

HOMESURE

Mastertouch

दीवारों के
दीवाने



**SUPERIOR
FINISH**

Primer
(Interior & Exterior)



**RICH
COLOUR**

Distemper



**LONG
LASTING**

Emulsion
(Interior & Exterior)



EXTERIOR PRIMER

Mastertouch Exterior Primer is water thinnable wall primer specially featured with ease of application and fast drying properties. It enhances the surface smoothness and provides good adhesion to the topcoat.



FEATURES



Excellent workability



Free from heavy metal



Algae & fungal resistant



Excellent adhesion



Superior coverage



Smooth brushability

SUBSTRATE

Mastertouch Exterior Primer is suitable on new or previously painted masonry surfaces such as brickwork, plaster, cement, rendering and semi-permanent interior finishes.

COMPOSITION

- Pigment: Non-lead Pigments
- Extenders: Non-lead Fillers
- Binder: Styrene-Acrylic Emulsion
- Solvent: Water

SHELF LIFE

18 months from date of manufacturing in original tightly closed containers. To be kept away from direct sunlight and excessive heat.

PRODUCT BENEFIT

- Value for Money
- Easy Application
- Eco Friendly
- Prevent peeling of top coat

| TECHNICAL DATA | |
|----------------|---|
| PARAMETERS | SPECIFICATIONS |
| Nature | White Free Flowing Liquid |
| Dilution ratio | Apply 1:1 by volume & for best performance use 50% with clean water |
| Application | By Brush, Roller, and Spray |
| Coverage | 80-100 Sq. Ft / Ltr / Coat (may vary on surface condition) |
| Drying time | Surface dry: 30 min. ReCoatability: 3-4 hrs. |
| Finish | Matt & Smooth |

SUBSTRATE PREPARATION

- New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces. For repairing plaster surface use HomeSure WalliEX Ready Mix Plaster (for guidelines refer HomeSure WalliEX Ready Mix Plaster TDS).
- Ensure the surface is completely free from dirt, dust, loose paints, powdery residue, oil greases or any other contaminants.
- Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing and cleaning with water.
- Before application any crack and minor damages on surface should be repaired with HomeSure WalliEX Crack Filler (for guidelines refer HomeSure WalliEX Crack Filler TDS).

MIXING

- Dilution: 50% with clean water.
- Ensure proper mixing of water in material before application.

PRIMER APPLICATION PROCESS

- Apply one coat of Mastertouch Exterior Primer with proper dilution and allow to dry for 4-6 hrs. before topcoat application.
- Application can be done by using brush, roller or spray.

USAGE PRECAUTIONS

- Do not alter water addition than recommended level.
- Only one coat required.
- Mastertouch Exterior Primer contains non-toxic material but still, it is important to wear a safety kit mixing and handling paint.

POST PAINTING CARE

- For the best performance of the paints, ensure proper washing and cleaning of algae and fungal growth.
- Washing should be done on regular interval of six months.









INTERIOR PRIMER

Mastertouch Interior Primer is water thinnable wall primer specially featured with ease of application and fast drying properties. It enhances the surface smoothness and provides good adhesion to the topcoat.



FEATURES

- | | | |
|---|---|--|
|  <p>Excellent workability</p>  <p>Free from heavy metal</p> |  <p>Algae & fungal resistant</p>  <p>Excellent adhesion</p> |  <p>Superior coverage</p>  <p>Good opacity</p> |
|---|---|--|

SUBSTRATE

Mastertouch Interior Primer is suitable on new or previously painted masonry surfaces such as brickwork, plaster, cement, rendering and semi-permanent interior finishes.

COMPOSITION

- Pigment: Non-lead Pigments
- Extenders: Non-lead Fillers
- Binder: Styrene-Acrylic Emulsion
- Solvent: Water

SHELF LIFE

18 months from date of manufacturing in original tightly closed containers. To be kept away from direct sunlight and excessive heat.

PRODUCT BENEFIT

- Value for Money
- Easy Application
- Eco Friendly
- High Durability

| TECHNICAL DATA | |
|----------------|---|
| PARAMETERS | SPECIFICATIONS |
| Nature | White Free Flowing Liquid |
| Dilution ratio | 1 : 1 (100% with clean water) |
| Application | By Brush, Roller or Spray |
| Coverage | 130-150 sq.ft./Ltr/coat (may vary on surface condition) |
| Drying time | 4-6 hrs. |
| Finish | Smooth & Matt |
| Stability | Stability of thinned paint is 24hrs. |

SUBSTRATE PREPARATION

- New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces. For repairing plaster surface use HomeSure WallEX Ready Mix Plaster (for guidelines refer HomeSure WallEX Ready Mix Plaster TDS).
- Ensure the surface is completely free from dirt, dust, loose paints, powdery residue, oil greases or any other contaminants.
- Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing and cleaning with water.
- Before application any crack and minor damages on surface should be repaired with HomeSure WallEX Crack Filler (for guidelines refer HomeSure WallEX Crack Filler TDS).

MIXING

- Dilution: 100% with clean water.
- Ensure proper mixing of water in material before application.

PRIMER APPLICATION PROCESS

- Apply one coat of Mastertouch Interior Primer with proper dilution and allow to dry for 4-6 hrs.
- Apply HomeSure Wall Putty (for guidelines refer HomeSure Wall Putty TDS).
Ensure surface smoothness and levelling by sanding with sandpaper 180 and wipe clean.
- Apply one coat of Mastertouch Interior Primer with proper dilution and allow to dry for 4-6 hrs. before topcoat application.
- Application can be done by using brush, roller or spray.

USAGE PRECAUTIONS

- Do not alter water addition than recommended level.
- Only one coat required.
- Mastertouch Interior Primer contains non-toxic material but still, it is important to wear a safety kit while mixing and handling paint.

POST PAINTING CARE

- For the best performance of the paints, ensure proper washing and cleaning of algae and fungal growth.
- Washing should be done on regular interval of six months.



DISTEMPER

Mastertouch Distemper is water thinnable washable acrylic distemper suitable for interior walls. It helps to improve aesthetic appearance of surfaces.



FEATURES



Excellent workability



Good opacity



Free from heavy metal



Good washability



Fully water based



Matt & smooth finish

SUBSTRATE

Mastertouch Distemper is suitable on new or previously painted masonry surfaces such as primer surface and semi-permanent interior finishes.

SHELF LIFE

18 months from date of manufacturing in original tightly closed containers. To be kept away from direct sunlight and excessive heat.

COMPOSITION

- Pigment: Non-lead Pigments
- Extenders: Non-lead Fillers
- Binder: Styrene-Acrylic Emulsion
- Solvent: Water

PRODUCT BENEFIT

Value for Money
Easy Application
Eco Friendly
High coverage

| TECHNICAL DATA | |
|----------------|--|
| PARAMETERS | SPECIFICATIONS |
| Nature | White Free Flowing Liquid |
| Dilution ratio | 600-650 ml water for 1 Kg |
| Application | By Brush, Roller or Spray |
| Coverage | 85-100 sq.ft./Kg/2 coats (may vary on surface condition) |
| Drying time | 4-6 hrs. |
| Finish | Smooth & Matt |
| Stability | Stability of thinned paint is 24 hrs. |

SUBSTRATE PREPARATION

- New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces. For repairing plaster surface use HomeSure WallEX Ready Mix Plaster (for guidelines refer HomeSure WallEX Ready Mix Plaster TDS)
- Ensure the surface is completely free from dirt, dust, loose paints, powdery residue, oil greases or any other contaminants.
- Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing and cleaning with water.
- Before application any crack and minor damages on surface should be repaired with HomeSure WallEX Crack Filler (for guidelines refer HomeSure WallEX Crack Filler TDS).

MIXING

- Dilution: 600-650 ml water for 1 Kg.
- Ensure proper mixing of water in material before application.

PRIMER APPLICATION PROCESS

- Apply one coat of Mastertouch Interior Primer with proper dilution and allow to dry for 4-6 hrs. (for guidelines refer Mastertouch Interior Primer TDS).
- Apply HomeSure Wall Putty (for guidelines refer HomeSure Wall Putty TDS). Ensure surface smoothness and levelling by sanding with sandpaper 180 and wipe clean.
- Apply one coat of Mastertouch Interior Primer with proper dilution and allow to dry for 4-6 hrs. before topcoat application.
- Application can be done by using brush, roller or spray.

DISTEMPER APPLICATION PROCESS

- On primer application, apply two coats of Mastertouch Distemper with 60-65% water dilution.
- Keep 4-6 hrs drying time between two coats.
- Application can be done by using brush, roller or spray.

USAGE PRECAUTIONS

- Do not alter water addition than recommended level.
- For better performance two coat application is required.
- Mastertouch Distemper contains non-toxic material but still, it is important to wear a safety kit while mixing and handling paint.

POST PAINTING CARE

- For the best performance of the paints, ensure proper washing and cleaning of algae and fungal growth.
- Washing should be done on regular interval of six months.

हर रंग में
मोहे रंग दे!

अपने घर और जिंदगी में लाएं Vivid का जादू

VIVID EXTERIOR EMULSION

Mastertouch Vivid Exterior Emulsion is a high quality modified acrylic emulsion specially designed for use in dry or less humid climate & provides good algae & fungal resistance. It has a special anti-peel formula that gives excellent resistance against chalking & peeling.

Available in 1, 4, 10 & 20 L



FEATURES



**Rich & smooth
matt finish**



**Water
resistant**



**Anti peel
formula**



**Anti fungal
protection**



**Good
washability**



**Free from
heavy metal**

SUBSTRATE

All kind of well-prepared exterior plasters, concrete and masonry surfaces.

COVERAGE

50-70 Sq. Ft / Ltr / 2 Coat

(Actual Coverage may depend on factors like Surface Preparation, Method of Application, Dilution etc.)

SHELF LIFE

36 months from the date of manufacture in original tightly closed container.

PRODUCT BENEFIT

Rich Aesthetic Look
Smooth and Matt Finish
Value for Money
Easy Application
Eco Friendly

| TECHNICAL DATA | |
|-------------------------|---|
| PARAMETERS | SPECIFICATIONS |
| Nature | White Free Flowing Liquid |
| Dilution ratio | 750 ml of clean water/1L of emulsion |
| Application | By Brush, Roller or Spray |
| Drying time | Surface dry: 30 min. Re - Coatability: 6-8 hrs. |
| Sheen level | 2-3 at 60° GH |
| VOC Content | Low VOC |
| Stability of thin paint | To be used within 24 hrs. |

SUBSTRATE PREPARATION

- New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces For repairing plaster surface use HomeSure WallEX Ready Mix Plaster (for guidelines refer HomeSure WallEX Ready Mix Plaster TDS).
- Ensure the surface is completely free from dirt, dust, loose paints, powdery residue, oil greases or any other contaminants.
- Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing and cleaning with water.
- Before application any crack and minor damages on surface should be repaired with HomeSure WallEX Crack Filler (for guidelines refer HomeSure WallEX Crack Filler TDS)

PRIMER APPLICATION PROCESS

- Apply one coat of Mastertouch Exterior Primer with proper dilution and allow to dry for 4-6 hrs. before top coat application. (For guidelines refer Mastertouch Exterior Primer TDS).
- Application can be done by using brush, roller or spray.

TOPCOAT EMULSION APPLICATION PROCESS

- On primer application, apply two coats of Mastertouch Vivid Exterior Emulsion with proper dilution.
- Keep 6-8 hrs drying time between two coats.
(Drying time may vary according to the temperature and humidity.)
- Application can be done by using brush, roller or spray.
- For darker shades require additional third coat.

USAGE PRECAUTIONS

- Do not alter water addition than recommended level.
- For better performance two coat application is required.
- Mastertouch Vivid Exterior Emulsion contains non-toxic material but still, it is important to wear a safety kit while mixing and handling paint.

POST PAINTING CARE

- For the best performance of the paints, ensure proper washing and cleaning of algae and fungal growth.
- Washing should be done on regular interval of six months.



VIVID INTERIOR EMULSION

Mastertouch Vivid Interior Emulsion is a water-based acrylic emulsion paint that offers a smooth matt finish to the walls. It gives high opacity and long-lasting paint film.

Available in 1, 4, 10 & 20 L



FEATURES



**Smooth & stylish
matt finish**



**Excellent
whiteness & opacity**



**Excellent
coverage**



**Anti
chalking**



**Good
washability**



**Free from
heavy metal**

SUBSTRATE

All types of well-prepared interior plasters, concrete and masonry surfaces

COVERAGE

100-120 Sq. Ft / Ltr / 2 Coat

(Actual Coverage may depend on factors like Surface Preparation, Method of Application, Dilution etc.)

SHELF LIFE

36 months from the date of manufacture in original tightly closed container

PRODUCT BENEFIT

Rich Aesthetic Look
Smooth and Matt Finish
Value for Money
Easy Application
Eco Friendly

| TECHNICAL DATA | |
|-------------------------|---|
| PARAMETERS | SPECIFICATIONS |
| Nature | White Free Flowing Liquid |
| Dilution ratio | 400-500 ml of clean water/ 1L of emulsion |
| Application | By Brush, Roller or Spray |
| Drying time | Surface dry: 30 min. Re - Coatability: 4-6 hrs. |
| Sheen level | 2-3 at 60° GH |
| VOC Content | Low VOC |
| Stability of thin paint | To be used within 24 hrs. |

SUBSTRATE PREPARATION

- New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces For repairing plaster surface use HomeSure WallEX Ready Mix Plaster (for guidelines refer HomeSure WallEX Ready Mix Plaster TDS).
- Ensure the surface is completely free from dirt, dust, loose paints, powdery residue, oil greases or any other contaminants.
- Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing and cleaning with water.
- Before application any crack and minor damages on surface should be repaired with HomeSure WallEX Crack Filler (for guidelines refer HomeSure WallEX Crack Filler TDS)

PRIMER APPLICATION PROCESS

- Apply one coat of Mastertouch Interior Primer with proper dilution and allow to dry for 4-6 hrs. (for guidelines refer Mastertouch Interior Primer TDS).
- Apply HomeSure Wall Putty (for guidelines refer HomeSure Wall Putty TDS). Ensure surface smoothness and levelling by sanding with sandpaper 180 and wipe clean.
- Apply one coat of Mastertouch Interior Primer with proper dilution and allow to dry for 4-6 hrs. before topcoat application.
- Application can be done by using brush, roller or spray.

TOPCOAT EMULSION APPLICATION PROCESS

- On primer application, apply two coats of Mastertouch Vivid Interior Emulsion with 40-50% water dilution.
- Take 4-6 hrs. drying time between two coats. (Drying time may vary according to the temperature and humidity.)
- Application can be done by using brush, roller or spray.
- For darker shades require additional third coat.

USAGE PRECAUTIONS

- Do not alter water addition than recommended level.
- For better performance two coat application is required.
- Mastertouch Vivid Interior Emulsion contains non-toxic material but still, it is important to wear a safety kit while mixing and handling paint.

POST PAINTING CARE

- For the best performance of the paints, ensure proper washing and cleaning of algae and fungal growth.
- Washing should be done on regular interval of six months.

*Shades that
 define you*

BLOOM EXTERIOR EMULSION

Mastertouch Bloom Exterior Emulsion is a premium exterior emulsion. It is formulated with unique Stay Clean Technology (SCT) to withstand harsh environmental conditions like rainfall, humidity, and heat. Bloom Exterior comes with a rich sheen finish, it magnifies the beauty of your house.

Available in 1, 4, 10 & 20 L



FEATURES



Dust Proof



Excellent Shine



Excellent coverage



Anti-Fungal & Anti-Algal



UV Protection



Free from heavy metal

SUBSTRATE

All types of well-prepared interior plasters, concrete, and masonry surfaces

COVERAGE

50-60 Sq. Ft / Ltr / 2 Coat

(Actual Coverage may depend on factors like Surface Preparation, Method of Application, Dilution, climate condition etc)

SHELF LIFE

36 months from date of manufacture in original tightly closed container

PRODUCT BENEFIT

Dust Proof Technology
 Very high Washability and Scrub Resistance
 Ease of Application
 Rich Sheen Finish
 5 years Performance Warranty

| TECHNICAL DATA | |
|-------------------------------|---|
| PARAMETERS | SPECIFICATIONS |
| Nature | White Viscous Liquid |
| Dilution ratio | 400 ml of clean water/ 1l of emulsion |
| Application | By Brush, Roller or Spray |
| Drying time | Surface dry: 30 min. Re - Coatability: 4-6 hrs. |
| Sheen level (for White Shade) | 2-3 at 60° GH, 15-20 at 85° GH |
| VOC Content | Low VOC |
| Stability of thin paint | To be used within 24 hrs. |

SUBSTRATE PREPARATION

- New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces. For repairing plaster surface use HomeSure WallEX Ready Mix Plaster (for guideline refer HomeSure WallEX Ready Mix Plaster TDS).
- Ensure the surface should be completely free from dirt, dust, loose paints, powdery residue, oil greases or any other contaminants.
- Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing and cleaning with water.
- Before application any crack and minor damages on surface should be repaired with HomeSure WallEX Crack Filler (for guideline refer HomeSure WallEX Crack Filler TDS)

PRIMER APPLICATION PROCESS

- Apply one coat of Mastertouch Exterior Primer with proper dilution and allow to dry for 4-6 hrs. before topcoat application. (For guideline refer Mastertouch Exterior primer TDS).
- Application can be done by using brush, roller, spray.

TOPCOAT EMULSION APPLICATION PROCESS

- On primer application, apply two coats of Mastertouch Bloom Exterior Emulsion with 40% water dilution.
- Keep 6-8 hr drying time between two coats.
(Drying time may vary according to the temperature and humidity.)
- Application can be done by using brush, roller, spray.
- For darker shades require additional 3rd coat.

USAGE PRECAUTIONS

- Do not alter water addition than recommended level.
- For better performance two coat application is required.
- Mastertouch Bloom Exterior Emulsion contains non-toxic material but still, it is important to wear a safety kit while mixing and handling Paint.

POST PAINTING CARE

- For the best performance of the paints, ensure proper washing and cleaning of algae and fungal growth.
- Washing should be done on regular intervals of six month.



*Shades that
 define you*

BLOOM INTERIOR EMULSION

Mastertouch Bloom Interior Emulsion is a water-based emulsion well formulated with properties like sheen, anti-fading, anti-fungus. Bloom interior emulsion has a long-lasting film that keeps your house good for years. It provides a smooth sheen finish in reasonable price. Available in 1, 4, 10 & 20 L



FEATURES



**Stain Guard
 Technology**



**Scrub
 Resistance**



**Super
 Acrylic Quality**



**Anti-Fungal
 & Anti-Algal**



**Excellent
 Shine**



**Free from
 heavy metal**

SUBSTRATE

All types of well-prepared interior plasters, concrete, and masonry surfaces

COVERAGE

120-140 Sq. Ft / Ltr / 2 Coat
 (Actual Coverage may depend on factors like Surface Preparation, Method of Application, Dilution etc.)

SHELF LIFE

36 months from date of manufacture in original tightly closed container

PRODUCT BENEFIT

Stain Guard Technology
 Very high Washability and Scrub Resistance
 Smooth finish with Mid Sheen
 Ease of Application
 Excellent Coverage
 3 years Performance Warranty

| TECHNICAL DATA | |
|-------------------------|---|
| PARAMETERS | SPECIFICATIONS |
| Nature | White Viscous Liquid |
| Dilution ratio | 500 ml of clean water/1l of emulsion |
| Application | By Brush, Roller or Spray |
| Drying time | Surface dry: 30 min. Re - Coatability: 4-6 hrs. |
| Sheen level | 2-3 at 60° GH, 20-30 at 85° GH |
| VOC Content | Low VOC |
| Stability of thin paint | To be used within 24 hrs. |

SUBSTRATE PREPARATION

- New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces. For repairing plaster surface use HomeSure WallEX Ready Mix Plaster (for guideline refer HomeSure WallEX Ready Mix Plaster TDS).
- Ensure the surface should be completely free from dirt, dust, loose paints, powdery residue, oil greases or any other contaminants.
- Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing and cleaning with water.
- Before application any crack and minor damages on surface should be repaired with HomeSure WallEX Crack Filler (for guideline refer HomeSure WallEX Crack Filler TDS).

PRIMER APPLICATION PROCESS

- Apply one coat of Mastertouch Interior Primer with proper dilution and allow to dry for 4-6 hrs. (for guideline refer Mastertouch Interior Primer TDS)
- Apply HomeSure Wall Putty (for guidelines refer HomeSure Wall Putty TDS).
Ensure surface smoothness and levelling by sanding with sandpaper 180 and wipe clean.
- Apply one coat of Mastertouch Interior Primer with proper dilution and allow to dry for 4-6 hrs. before topcoat application.
- Application can be done by using brush, roller or spray.

TOPCOAT EMULSION APPLICATION PROCESS

- On primer application, apply two coats of Mastertouch Bloom Interior Emulsion with 50% water dilution.
- Take 4-6 hrs drying time between two coats. (Drying time may vary according to the temperature and humidity.)
- Application can be done by using brush, roller, spray.
- For darker shades require additional 3rd coat.

USAGE PRECAUTIONS

- Do not alter water addition than recommended level.
- For better performance two coat application is required.
- Mastertouch Bloom Interior Emulsion contains non-toxic material but still, it is important to wear a safety kit while mixing and handling Paint.

POST PAINTING CARE

- For the best performance of the paints, ensure proper washing and cleaning of algae and fungal growth, if any, Washing should be done on regular intervals of six month.



WATERLOCK

HomeSure Mastertouch Waterlock is an acrylic polymer based waterproofing protective coating formulated with selected elastomeric, resilient acrylic polymers and reinforcing synthetic fibres. Post application when cured it forms a seamless durable membrane thus offering ultimate waterproofing. It can be used as a waterproofing coating on roofs, terraces, parapet walls, sunshades and vertical walls.

Available in 4, 10 & 20 L



FEATURES

-  **Ease of Application**
-  **No Need Of Hacking**
-  **Good Water Resistance**
-  **Excellent Grip**
-  **Free from heavy metal**

STORAGE:

Store in cool, dry & well-ventilated place, away from heat source & direct sunlight.

COVERAGE

| | |
|--|-----------------------------|
| On Horizontal surface | 0.8 - 1 m ² /L |
| For Fresh painting on Vertical surface | 1.9 - 2.4 m ² /L |
| For Repainting on Vertical surface | 2.6 - 3.2 m ² /L |

Note: Coverage depends on surface texture & porosity.

SHELF LIFE

18 months from the date of manufacturing when stored in proper condition.

PRECAUTIONS

Surface preparation is must before application. Allow to dry for 4-6 hours after each coat of applications. Don't apply during rain or extreme temperature. Use hand gloves, safety goggles while using. Keep out of children reach.

| TECHNICAL DATA | |
|---|---|
| PARAMETERS | SPECIFICATIONS |
| Nature | White Viscous liquid |
| Composition | Acrylic emulsion, selected filler additives |
| Specific gravity at 27°C | 1.28 ± 0.02 |
| Non-volatile content % | 50 - 55% |
| Ph | 8 -10 |
| Water permeability (up to 4 bar pressure) | Passes |
| Dry adhesion strength, mpa | > 1.5 |
| Tensile strength mpa | > 2 MPa |
| Elongation % | > 200 |

APPLICATION

- Prior to application of HomeSure Mastertouch Waterlock, all surfaces must be prepared properly to avoid failure.
 - New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces to gain maximum output.
 - Clean loose particles, dirt, grease, and traces of foreign materials from the surface, if necessary, by using wire brush/ sand paper or by chipping and the surface should be properly clean with water.
 - Cracks up to 3 mm must be filled with HomeSure Crack Filler. Bigger cracks, damaged portions and hollow areas must be repaired with polymer modified cement mortars.
- **Horizontal Surface:** For self-priming dilute the material with 3:1 proportion (3 parts of Waterlock to 1 part of Water) & apply on the concrete surface.
 - After 3-5 hours of priming apply 2 coat of undiluted HomeSure Mastertouch Waterlock with 4-6 hours span in each coat.
- **Vertical Surface:**
- For Fresh Painting** – First apply self-priming coat prepared with 3-part HomeSure Mastertouch Waterlock : 1 part water, then apply second coat of undiluted HomeSure Mastertouch Waterlock in a span of 4-6hours.
 - For Repainting** – On previously painted surfaces apply single coat of undiluted HomeSure Mastertouch Waterlock.
Topcoat: - As per desired shade apply 2 coats of Homesure Mastertouch Emulsion paint in a span of 4-6 hours.

Tested according to ASTM D 412, EN 1015-12, IS 2645 & Internal test method

MasterTouch

Vivid

Emulsion

Walplast®

बना दे जिंदगी —
सतरंगी रे!

अपने घर और जिंदगी में लाएं
Vivid का जादू



NEW

Available in
1L, 4L, 10L & 20L


RICH & SMOOTH
MATT FINISH


WATER
RESISTANT


GOOD
WASHABILITY


ANTI-PEEL &
ANTI-FUNGAL PROPERTIES


EXCELLENT COVERAGE,
WHITENESS & OPACITY



Inspiration Meets Colour

1800 3000 6650


MasterTouch

Bloom

Walplast®

Where the walls define your unique identity

*Shades that
define you*

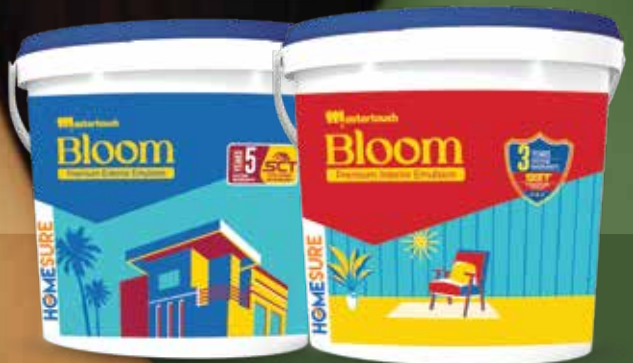

EXCELLENT
COVERAGE & OPACITY



ANTI-FUNGAL
& ANTI-MICROBIAL



LONG LASTING
WEATHER-PROOF SOLUTION

Available in 1L, 4L, 10L & 20L



www.walplast.com

HOMESURE

Mastertouch

— दीवारों के दीवाने —



Walplast Products Pvt. Ltd. ISO 9001: 2015 Certified Company
Plot No A, 246, Cross Road Number 18, T.T.C. Industrial Area, MIDC
Industrial Area, Mahape, Navi Mumbai, Maharashtra-400 710.

www.walplast.com customercare@walplast.com 1800 3000 6650.

FOLLOW
US ON



SCAN FOR
MORE DETAILS

